

S21 Magnitude – Transmission

High Speed Interconnects Ultraflex Micro Coaxial Cable (UFX Coax) Performance

The following specifications are for 50 ohm fluoropolymer coax constructions intended for use in micro coaxial cable assemblies. Other coax constructions are available including custom. For more information please contact High Speed Interconnects Application Engineering at 888-565-7878.

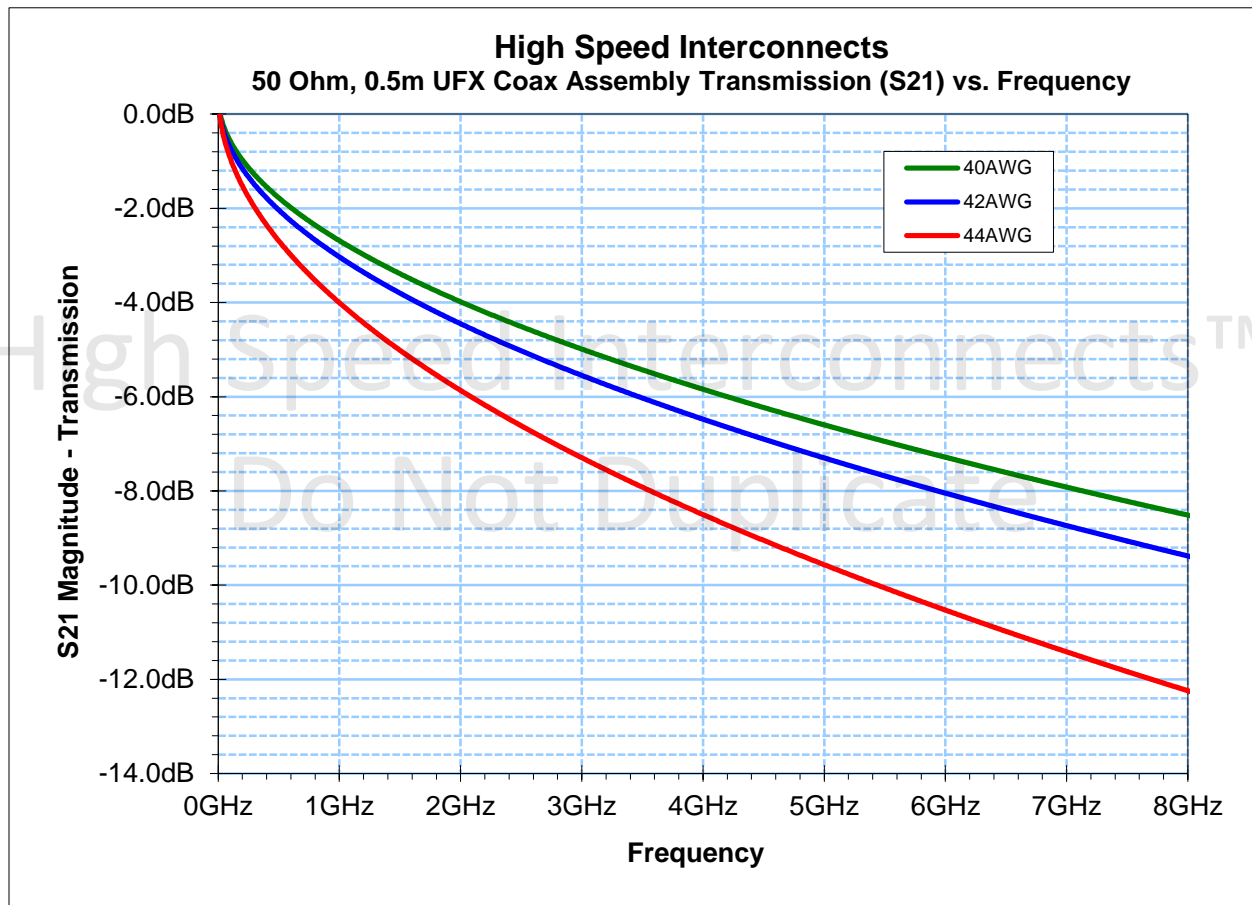


Chart shows S21 Magnitude as a function of frequency for each standard High Speed Interconnect UFX coax center conductor AWG size. Coax length is 0.5m for each test sample.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF HIGH SPEED INTERCONNECTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HIGH SPEED INTERCONNECTS IS PROHIBITED.

High Speed Interconnects, LLC - Copyright and Proprietary, 2012